

# RECYFIX® PLUS

## STABLE DRAINAGE.

WITH EDGE PROTECTION AND ATTRACTIVE DESIGN.





## AT A GLANCE

- ✓ For commercial precincts up to load class C 250 in accordance with DIN EN 1433
- ✓ Additional strength through galvanized / stainless steel frame
- ✓ Attractive appearance through visible metal edge



# RECYFIX® PLUS

## STABLE DRAINAGE.

WITH EDGE PROTECTION AND ATTRACTIVE DESIGN.

### THE ECOLOGICAL INNOVATION

RECYFIX PLUS channels consist of 100 % pure recycled polyolefine plastics. They can be integrated into the ecological material cycle and are 100 % recyclable. Green light for the environment! Because of their low weight, RECYFIX PLUS channels are easy to transport and install. At the same time, the system complies with the highest requirements regarding functionality and strength. RECYFIX PLUS channels have been developed for traffic areas exposed to high loads. An additional protection is provided by galvanised steel angle housings covering the top edges. The RECYFIX PLUS channel system is a complete system with all necessary accessories.

### HIGH-TECH DEVELOPMENT

RECYFIX PLUS channels have been developed in co-operation with a well-known research institute for plastic recycling. With the help of computer simulation it was possible to create a highly rigid construction with torsion-free ribs, which weighs significantly less than conventional channels made of mineral-based materials but has good performance characteristics and durability.

### RECYCLED PE-PP MATERIAL

RECYFIX PLUS channels consist of 100 % pure recycled polyolefine plastics. The material is characterised by its high chemical resistance, resistance to frost and salt, it is UV-stabilised, environmentally neutral and leakproof.

### DIN EN 1433

All RECYFIX PLUS channels meet the requirements of the European standard DIN EN 1433. The products carry the CE-mark.



Installation in polygonal patterns



Parking area

## A COMPREHENSIVE SYSTEM

RECYFIX PLUS channels are available in different heights and nominal widths. Canal connections are possible at the bottom, on the sides or ends. A choice of channel gratings is available to suit different surface finishes and load applications. The system is rounded off with end caps, foul air locks for vertical outlet and trash boxes with plastic mud bucket - optionally with internal foul air trap.



RECYFIX®  
PLUS

RECYFIX®  
STANDARD

SLOTTED  
CHANNELS

FASERFIX®  
STANDARD

RECYFIX®POINT  
FASERFIX®POINT

DACHFIX®

RECYFIX®  
GREEN SUPER

RECYFIX®  
GREEN STANDARD

RECYFIX®  
STREIF

LINEFIX®



# RECYFIX®PLUS

## STABLE DRAINAGE.

WITH EDGE PROTECTION AND ATTRACTIVE DESIGN.

RECYFIX®PLUS channels meet the requirements of DIN EN 1433 and are suitable for the following loading capacities:




**CATEGORY A 15,  
LOAD CLASS 15 KN**



**CATEGORY B 125,  
LOAD CLASS 125 KN**



**CATEGORY C 250,  
LOAD CLASS 250 KN**

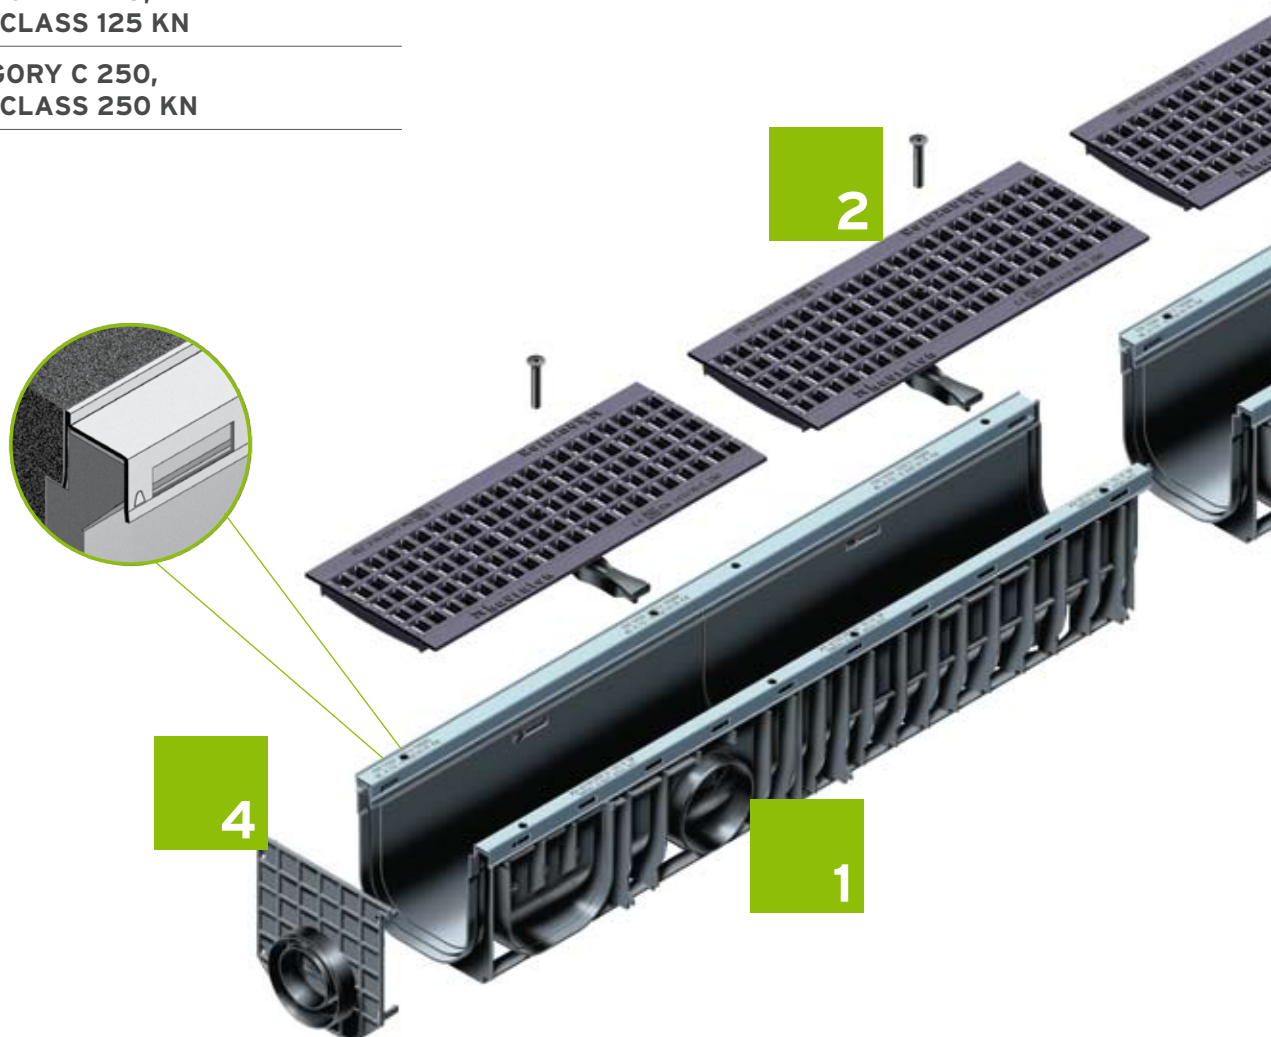

## GRATING OPTIONS FOR RECYFIX PLUS CHANNELS

GUGI-Ductile  
iron mesh  
gratings\*




Ductile iron  
gratings\*



Slotted  
gratings\*



Steel  
gratings\*



**Loading capacities as per DIN EN 1433  
suitable for passenger car traffic**

**B 125**

100

100


100, 150, 200

**C 250**

100, 150,  
200, 300

100, 200

\* nominal width

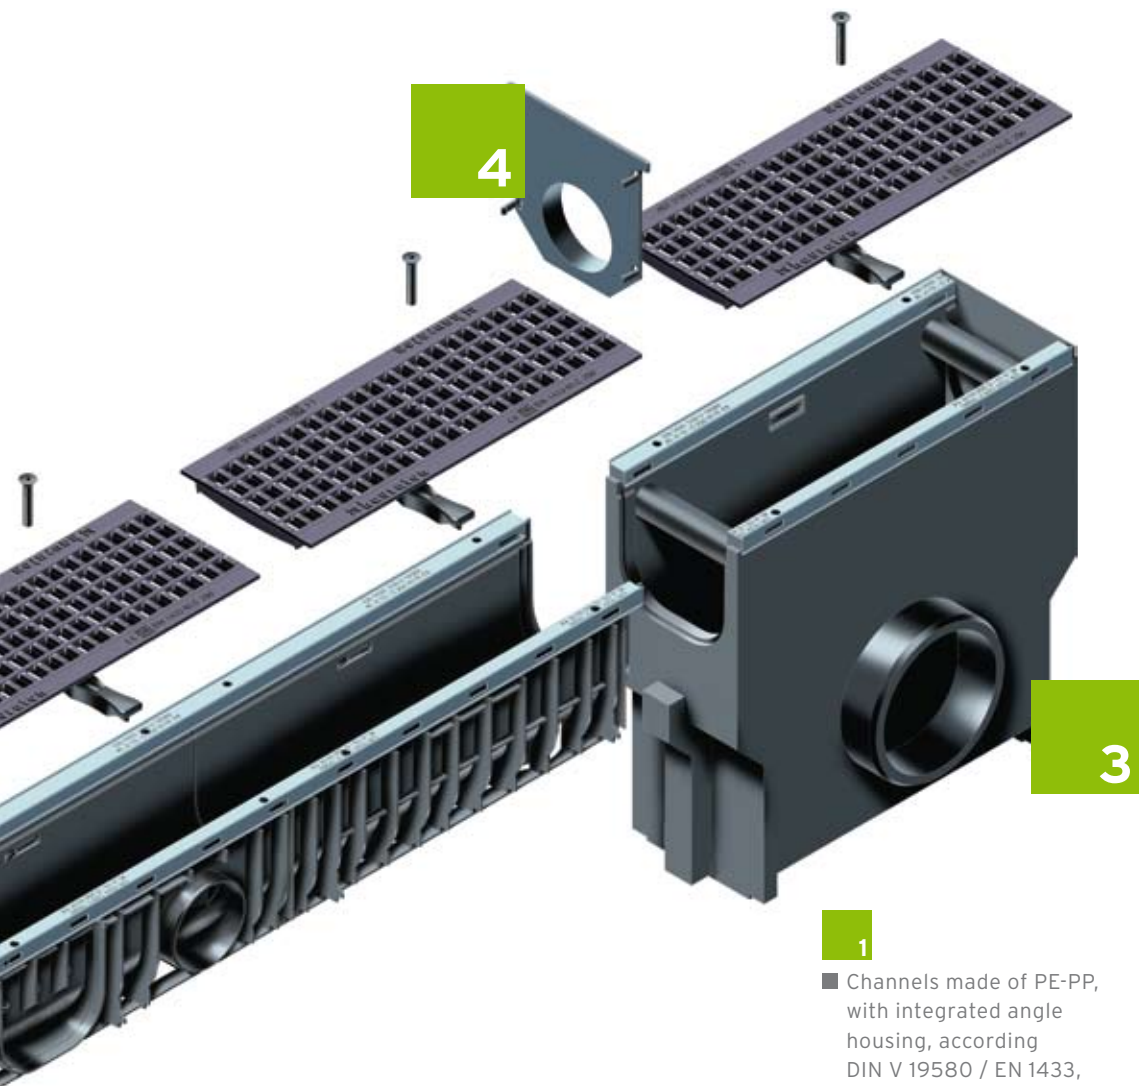

1

■ Channels made of PE-PP, with integrated angle housing, according DIN V 19580 / EN 1433, CE-conform, with tongue and groove connection for exact installation

2

■ numerous grating options, for example GUGI-Ductile iron mesh gratings

3

■ Trash box with pipe-connection possibilities

4

■ End caps with and without outlets

## SAFETY IN PEDESTRIAN ZONES

RECYFIX PLUS channels with their great choice of gratings are also used in pedestrian zones, on market squares and other public areas. To provide greater safety for pedestrians, gratings with narrow mesh sizes have been developed.



RECYFIX®  
PLUS

RECYFIX®  
STANDARD

SLOTTED  
CHANNELS

FASERFIX®  
STANDARD

RECYFIX®POINT  
FASERFIX®POINT

DACHFIX®

RECYFIX®  
GREEN SUPER

RECYFIX®  
GREEN STANDARD



RECYFIX®  
STREIF

LINEFIX®





# RECYFIX®PLUS 100

## RECYFIX®PLUS 100 - Combi article, class A 15

Type 60 with perforated grating, stainless steel, locked\*

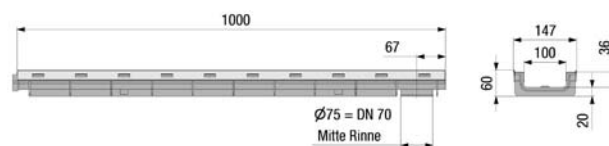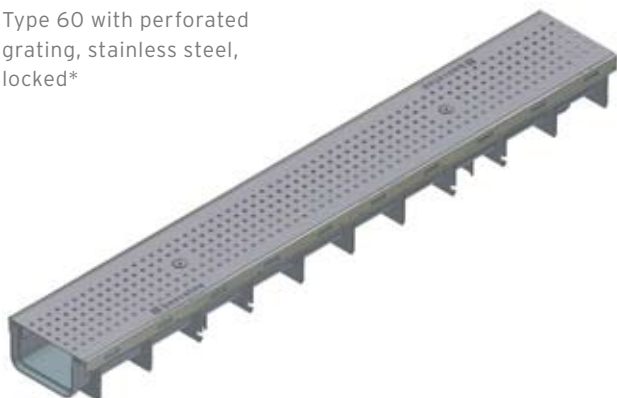

Type 01 with perforated grating, stainless steel, locked

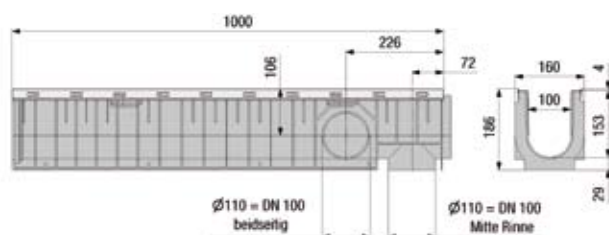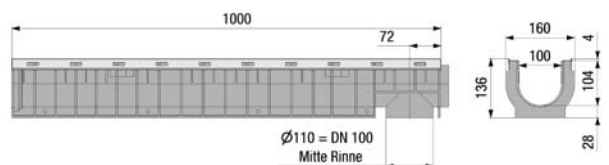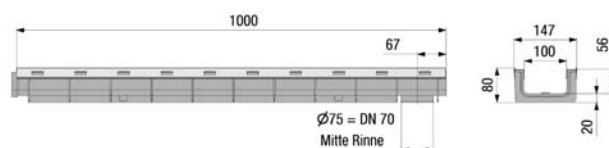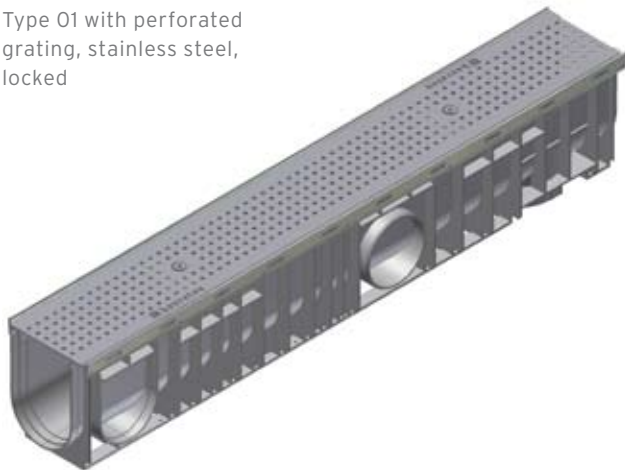


|                                                             | Length<br>mm | Width<br>mm | Height<br>mm | Drainage<br>cross-<br>sect. cm <sup>2</sup> | Intake<br>cross-<br>sect.<br>cm <sup>2</sup> /m | Weight<br>kg | Article No.<br>galvanised | Article No.<br>stainless<br>steel |
|-------------------------------------------------------------|--------------|-------------|--------------|---------------------------------------------|-------------------------------------------------|--------------|---------------------------|-----------------------------------|
| Type 60 with perforated grating, stainless steel, locked*   | 1000         | 147         | 60           | 25                                          | 161                                             | 3,9          | -                         | 41444                             |
| Type 80 with perforated grating, stainless steel, locked*   | 1000         | 147         | 80           | 45                                          | 161                                             | 4,1          | -                         | 41446                             |
| Type 01 with perforated grating, stainless steel, locked    | 1000         | 160         | 135          | 92                                          | 161                                             | 5,5          | -                         | 41440                             |
| Type 010 with perforated grating, stainless steel, locked   | 1000         | 160         | 185          | 142                                         | 161                                             | 6,4          | -                         | 41442                             |
| Type 0105 with perforated grating, stainless steel, locked  | 500          | 160         | 135          | 92                                          | 161                                             | 2,8          | -                         | 41447                             |
| Type 01005 with perforated grating, stainless steel, locked | 500          | 160         | 185          | 142                                         | 161                                             | 3,2          | -                         | 41448                             |





# RECYFIX®PLUS 100

## RECYFIX®PLUS 100 - Combi article, car traffic

Type 60 with slotted  
grating SW 75/9, locked\*

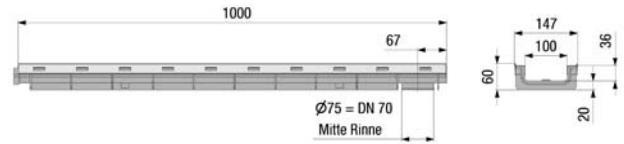

Type 010 with mesh grating  
MW 30/10, locked

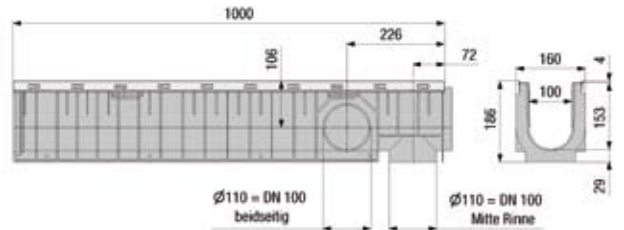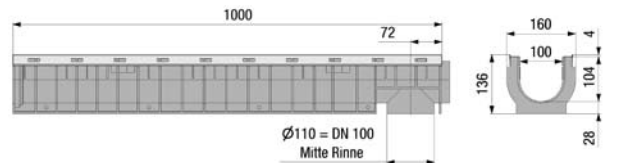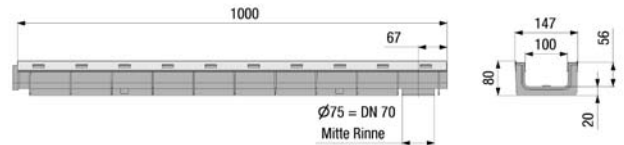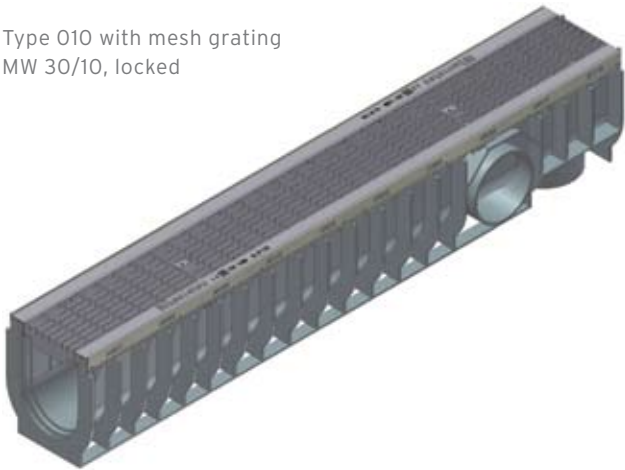

|                                                 | Length<br>mm | Width<br>mm | Height<br>mm | Drainage<br>cross-<br>sect. cm <sup>2</sup> | Intake<br>cross-<br>sect.<br>cm <sup>2</sup> /m | Weight<br>kg | Article No.<br>galvanised | Article No.<br>stainless<br>steel |
|-------------------------------------------------|--------------|-------------|--------------|---------------------------------------------|-------------------------------------------------|--------------|---------------------------|-----------------------------------|
| Type 60 with slotted grating SW 75/9, locked*   | 1000         | 147         | 60           | 25                                          | 280                                             | 4,0          | 40332                     | 41404                             |
| Type 80 with slotted grating SW 75/9, locked*   | 1000         | 147         | 80           | 45                                          | 280                                             | 4,1          | 40337                     | 41406                             |
| Type 60 with mesh grating MW 30/10, locked*     | 1000         | 147         | 60           | 25                                          | 650                                             | 5,2          | 40333                     | 41414                             |
| Type 80 with mesh grating MW 30/10, locked*     | 1000         | 147         | 80           | 45                                          | 650                                             | 5,3          | 40338                     | 41416                             |
| Type 01 with slotted grating SW 75/9, locked    | 1000         | 160         | 135          | 92                                          | 280                                             | 5,3          | 40344                     | 41400                             |
| Type 0105 with slotted grating SW 75/9, locked  | 500          | 160         | 135          | 92                                          | 280                                             | 2,8          | 40347                     | 41407                             |
| Type 010 with slotted grating SW 75/9, locked   | 1000         | 160         | 185          | 142                                         | 280                                             | 6,3          | 40339                     | 41402                             |
| Type 01005 with slotted grating SW 75/9, locked | 500          | 160         | 185          | 142                                         | 280                                             | 3,2          | 40341                     | 41408                             |
| Type 01 with mesh grating MW 30/10, locked      | 1000         | 160         | 135          | 92                                          | 650                                             | 6,5          | 40346                     | 41410                             |
| Type 0105 with mesh grating MW 30/10, locked    | 500          | 160         | 135          | 92                                          | 650                                             | 3,4          | 40348                     | 41417                             |
| Type 010 with mesh grating MW 30/10, locked     | 1000         | 160         | 185          | 142                                         | 650                                             | 7,5          | 40340                     | 41412                             |
| Type 01005 with mesh grating MW 30/10, locked   | 500          | 160         | 185          | 142                                         | 650                                             | 3,8          | 40343                     | 41418                             |

The quality of the stainless steel material is according CNS 1.4301.

RECYFIX®  
PLUS

RECYFIX®  
STANDARD

SLOTTED  
CHANNELS

FASERFIX®  
STANDARD

RECYFIX®POINT  
FASERFIX®POINT

DACHFIX®

RECYFIX®  
GREEN SUPER

RECYFIX®  
GREEN STANDARD

RECYFIX®  
STREIF




LINEFIX®






# RECYFIX®PLUS 100

## RECYFIX®PLUS 100 - Combi article, class B 125

Type 80 with mesh grating  
MW 30/10, galvanised,  
locked\*

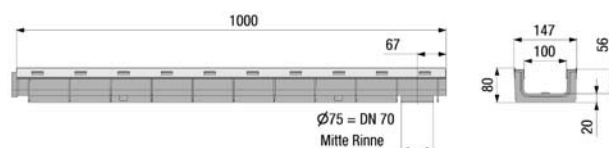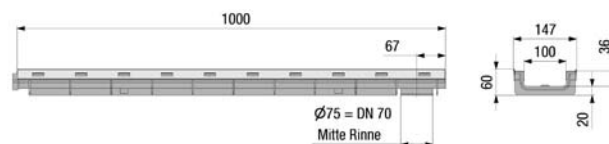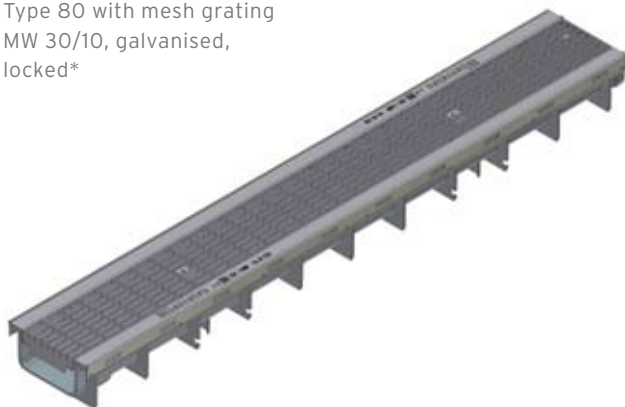

Type 010 with mesh grating  
MW 30/10, galvanised,  
locked

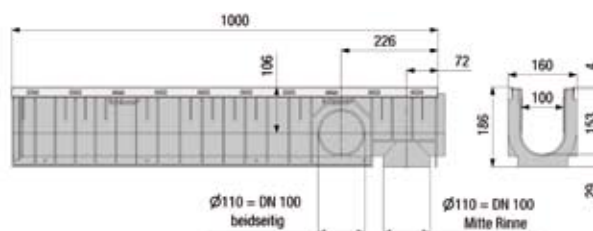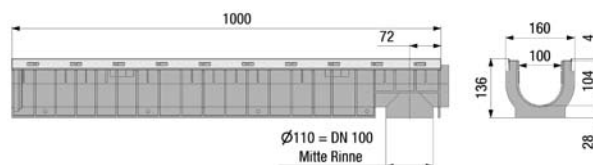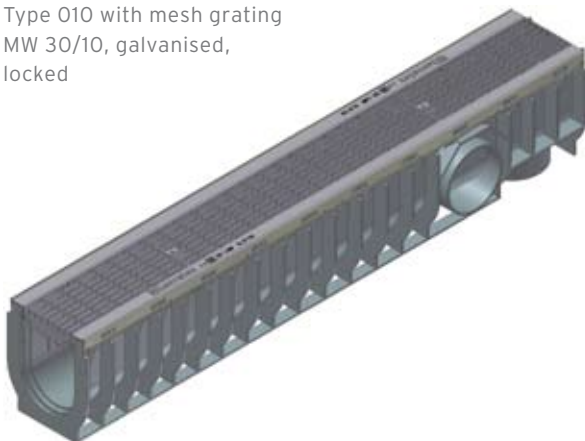

|                                                           | Length<br>mm | Width<br>mm | Height<br>mm | Drainage<br>cross-<br>sect. cm <sup>2</sup> | Intake<br>cross-<br>sect.<br>cm <sup>2</sup> /m | Weight<br>kg | Article<br>No. |
|-----------------------------------------------------------|--------------|-------------|--------------|---------------------------------------------|-------------------------------------------------|--------------|----------------|
| Type 60 with mesh grating MW 30/10, galvanised, locked*   | 1000         | 147         | 60           | 25                                          | 650                                             | 6,0          | 41424          |
| Type 80 with mesh grating MW 30/10, galvanised, locked*   | 1000         | 147         | 80           | 45                                          | 650                                             | 6,2          | 41426          |
| Type 01 with mesh grating MW 30/10, galvanised, locked    | 1000         | 160         | 135          | 92                                          | 650                                             | 7,5          | 41420          |
| Type 0105 with mesh grating MW 30/10, galvanised, locked  | 500          | 160         | 135          | 92                                          | 650                                             | 4,0          | 41427          |
| Type 010 with mesh grating MW 30/10, galvanised, locked   | 1000         | 160         | 185          | 142                                         | 650                                             | 8,5          | 41422          |
| Type 01005 with mesh grating MW 30/10, galvanised, locked | 500          | 160         | 185          | 142                                         | 650                                             | 4,4          | 41428          |

\* For common frequented areas we recommend FASERFIX SUPER KS channels, flat (catalogue CIVILS).



# RECYFIX®PLUS 100

## RECYFIX®PLUS 100 - Combi article, class C 250

Type 60 with GUGI-Ductile  
iron mesh grating MW  
20/30, black, locked\*



Type 01 with GUGI-Ductile  
iron mesh grating MW  
20/30, black, locked

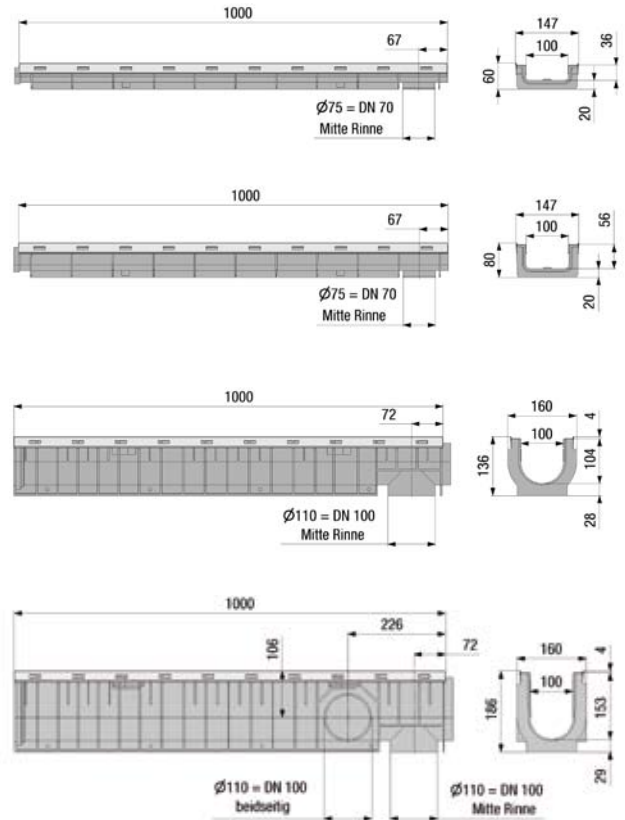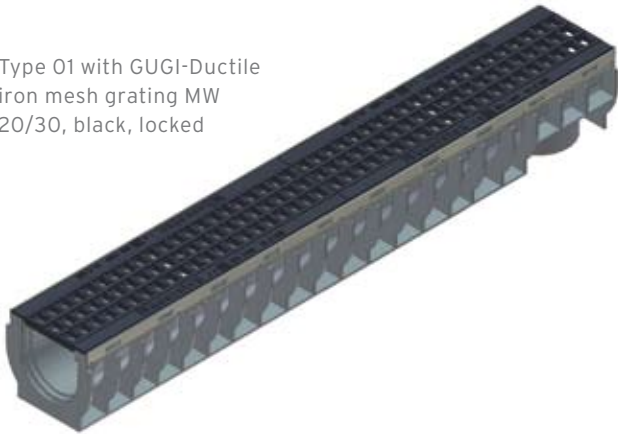

|                                                                       | Length<br>mm | Width<br>mm | Height<br>mm | Drainage<br>cross-<br>sect. cm <sup>2</sup> | Intake<br>cross-<br>sect. cm <sup>2</sup> /m | Weight<br>kg | Article<br>No. |
|-----------------------------------------------------------------------|--------------|-------------|--------------|---------------------------------------------|----------------------------------------------|--------------|----------------|
| Type 60 with GUGI-Ductile iron mesh grating MW 20/30, black, locked*  | 1000         | 147         | 60           | 25                                          | 444                                          | 7,4          | 40359          |
| Type 80 with GUGI-Ductile iron mesh grating MW 20/30, black, locked*  | 1000         | 147         | 80           | 45                                          | 444                                          | 7,4          | 40364          |
| Type 60 with ductile iron grating SW 80/14, black, locked*            | 1000         | 147         | 60           | 25                                          | 450                                          | 7,8          | 40362          |
| Type 60 with ductile iron grating SW 80/6, black, locked*             | 1000         | 147         | 60           | 25                                          | 290                                          | 8,6          | 40372          |
| Type 80 with ductile iron grating SW 80/14, black, locked*            | 1000         | 147         | 80           | 45                                          | 450                                          | 8,0          | 40367          |
| Type 80 with ductile iron grating SW 80/6, black, locked*             | 1000         | 147         | 80           | 45                                          | 290                                          | 8,8          | 40377          |
| Type 01 with GUGI-Ductile iron mesh grating MW 20/30, black, locked   | 1000         | 160         | 135          | 92                                          | 444                                          | 8,6          | 40360          |
| Type 0105 with GUGI-Ductile iron mesh grating MW 20/30, black, locked | 500          | 160         | 135          | 92                                          | 444                                          | 7,4          | 40365          |
| Type 010 with GUGI-Ductile iron mesh grating MW 20/30, black, locked  | 1000         | 160         | 185          | 142                                         | 444                                          | 9,5          | 40380          |
| Type 0105 with GUGI-Ductile iron mesh grating MW 20/30, black, locked | 500          | 160         | 185          | 142                                         | 444                                          | 7,8          | 40385          |
| Type 01 with ductile iron grating SW 80/14, locked                    | 1000         | 160         | 135          | 92                                          | 450                                          | 9,0          | 40361          |
| Type 01 with ductile iron grating SW 80/6, locked                     | 1000         | 160         | 135          | 92                                          | 290                                          | 10,0         | 40363          |
| Type 0105 with ductile iron grating SW 80/14, locked                  | 500          | 160         | 135          | 92                                          | 450                                          | 7,6          | 40366          |
| Type 0105 with ductile iron grating SW 80/6, locked                   | 500          | 160         | 135          | 92                                          | 290                                          | 8,1          | 40368          |
| Type 010 with ductile iron grating SW 80/14, locked                   | 1000         | 160         | 185          | 142                                         | 450                                          | 9,9          | 40381          |
| Type 010 with ductile iron grating SW 80/6, locked                    | 1000         | 160         | 185          | 142                                         | 290                                          | 10,9         | 40383          |
| Type 0105 with ductile iron grating SW 80/14, locked                  | 500          | 160         | 185          | 142                                         | 450                                          | 8,0          | 40386          |
| Type 0105 with ductile iron grating SW 80/6, locked                   | 500          | 160         | 185          | 142                                         | 290                                          | 8,5          | 40388          |

\* For common frequented areas we recommend FASERFIX SUPER KS channels, flat (catalogue CIVILS).

RECYFIX®  
PLUS

RECYFIX®  
STANDARD

SLOTTED  
CHANNELS

FASERFIX®  
STANDARD

RECYFIX®POINT  
FASERFIX®POINT

DACHFIX®

RECYFIX®  
GREEN SUPER

RECYFIX®  
GREEN STANDARD

RECYFIX®  
STREIF

LINEFIX®

# RECYFIX®PLUS 100


## RECYFIX®PLUS 100 - Accessories



Trash box with plastic bucket, with GUGI-Ductile iron mesh grating MW 20/30, black, class C 250, locked



Trash box with plastic bucket, with ductile iron grating SW 80/14, black, class C 250, locked




Foul air trap, vertical, DN 100



Foul air trap DN 100, inside



End cap combined made of PE-PP with outlet DN 70, type 01



End cap combined made of PE-PP with outlet DN 70, type 010

|                                                                                                         | Length<br>mm | Width<br>mm | Height<br>mm | Weight<br>kg | Article No.<br>galvanised | Article No.<br>stainless steel |
|---------------------------------------------------------------------------------------------------------|--------------|-------------|--------------|--------------|---------------------------|--------------------------------|
| Trash box with plastic bucket, with slotted grating SW 75/6, trafficable, locked                        | 500          | 160         | 419          | 4,8          | 40353                     | 41409                          |
| Trash box with plastic backed, with slotted grating SW 75/6, trafficable, locked                        | 500          | 160         | 419          | 5,4          | 40354                     | 41419                          |
| Trash box with plastic-bucket, with mesh grating MW 30/10, class B 125, locked                          | 500          | 160         | 419          | 6,2          | 41429                     | -                              |
| Trash box with plastic bucket, with GUGI-Ductile iron mesh grating MW 20/30, black, class C 250, locked | 500          | 160         | 419          | 6,6          | 40358                     | -                              |
| Trash box with plastic bucket, with ductile iron grating SW 80/14, black, class C 250, locked           | 500          | 160         | 419          | 6,8          | 40356                     | -                              |
| Trash box with plastic bucket, with ductile iron grating SW 80/6, black, class C 250, locked            | 500          | 160         | 419          | 7,3          | 40357                     | -                              |
| Trash box with plastic-bucket, with perforated grating, stainless steel, car-traffic, locked            | 500          | 160         | 419          | 5,1          | -                         | 41449                          |
| Foul air trap, vertical, DN 100                                                                         | -            | -           | -            | 0,5          | 40295                     | -                              |
| Foul air trap DN 100, inside                                                                            | -            | -           | -            | 0,2          | 40290                     | -                              |
| End cap closed, made of PE-PP, for type 60                                                              | -            | 147         | 60           | -            | 40284                     | -                              |
| End cap closed, made of PE-PP, for Type 80                                                              | -            | 147         | 80           | -            | 40291                     | -                              |
| End cap combined made of PE-PP with outlet DN 70, type 01                                               | -            | 160         | 135          | 0,1          | 40281                     | -                              |
| End cap combined made of PE-PP with outlet DN 70, type 010                                              | -            | 160         | 185          | 0,2          | 40283                     | -                              |
| Drilling of connecting holes DN 100                                                                     | -            | -           | -            | -            | 972                       | -                              |
| Cutting to length of NW 100                                                                             | -            | -           | -            | -            | 990                       | -                              |
| Sealing material SikaBond TS Fast, 600 ml, tubular bag, black                                           | -            | -           | -            | 0,6          | 6890                      | -                              |
| Tubular pistol for Sikaflex TS Fast                                                                     | -            | -           | -            | 1,3          | 6891                      | -                              |

The quality of the stainless steel material is according CNS 1.4301.





# RECYFIX®PLUS 100

| LINEFIX® | RECYFIX®<br>STREIF | RECYFIX®<br>GREEN STANDARD | RECYFIX®<br>GREEN SUPER | DACHFIX® | RECYFIX®POINT<br>FASERFIX®POINT | FASERFIX®<br>STANDARD | SLOTTED<br>CAHNNELS | RECYFIX®<br>STANDARD | RECYFIX®<br>PLUS |
|----------|--------------------|----------------------------|-------------------------|----------|---------------------------------|-----------------------|---------------------|----------------------|------------------|
|----------|--------------------|----------------------------|-------------------------|----------|---------------------------------|-----------------------|---------------------|----------------------|------------------|

# RECYFIX®PLUS 150

## RECYFIX®PLUS 150 - Combi article, class B 125



Type 01 with mesh grating  
MW 30/30, galvanised,  
locked

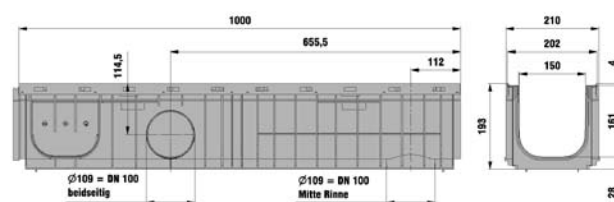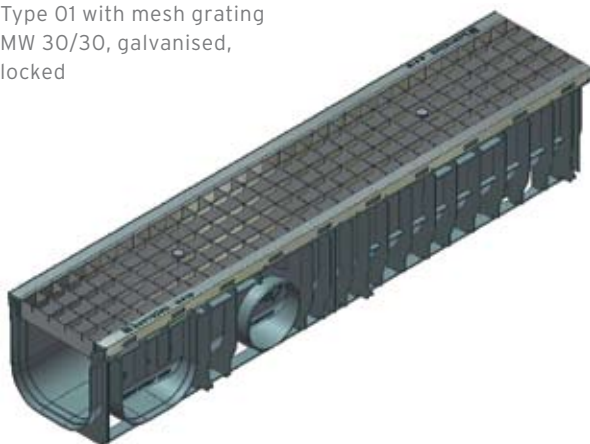

|                                                          | Length<br>mm | Width<br>mm | Height<br>mm | Drainage<br>cross-<br>sect. cm <sup>2</sup> | Intake<br>cross-<br>sect.<br>cm <sup>2</sup> /m | Weight<br>kg | Article<br>No. |
|----------------------------------------------------------|--------------|-------------|--------------|---------------------------------------------|-------------------------------------------------|--------------|----------------|
| Type 01 with mesh grating MW 30/30, galvanised, locked   | 1000         | 210         | 192          | 225                                         | 1081                                            | 7,8          | 41071          |
| Type 0105 with mesh grating MW 30/30, galvanised, locked | 500          | 210         | 192          | 225                                         | 1081                                            | 3,9          | 41046          |
| Type 01 with mesh grating MW 30/10, galvanised, locked   | 1000         | 210         | 192          | 225                                         | 1098                                            | 8,8          | 41077          |
| Type 0105 with mesh grating MW 30/10, galvanised, locked | 500          | 210         | 192          | 225                                         | 1098                                            | 2,9          | 41048          |

## RECYFIX®PLUS 150 - Combi article, class C 250


Type 01 with GUGI-Ductile  
iron mesh grating, black,  
locked

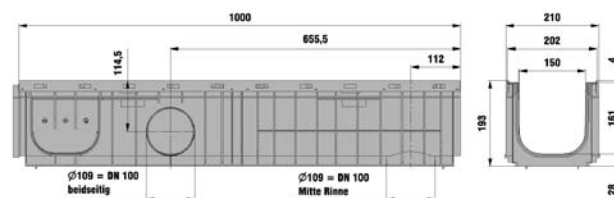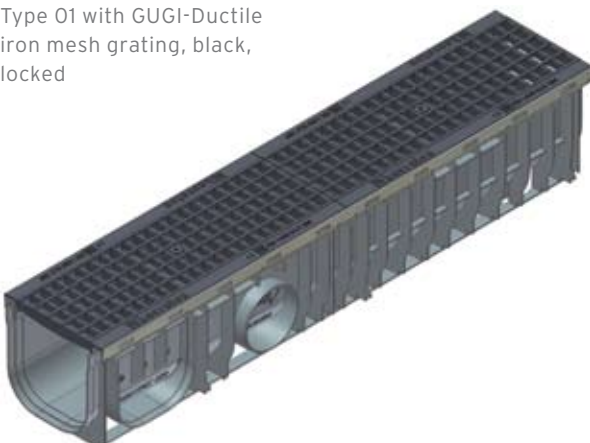

|                                                                       | Length<br>mm | Width<br>mm | Height<br>mm | Drainage<br>cross-<br>sect. cm <sup>2</sup> | Intake<br>cross-<br>sect.<br>cm <sup>2</sup> /m | Weight<br>kg | Article<br>No. |
|-----------------------------------------------------------------------|--------------|-------------|--------------|---------------------------------------------|-------------------------------------------------|--------------|----------------|
| Type 01 with GUGI-Ductile iron mesh grating, black, locked            | 1000         | 210         | 192          | 225                                         | 745                                             | 13,8         | 41075          |
| Type 0105 with GUGI-Ductile iron mesh grating MW 20/30, black, locked | 500          | 210         | 192          | 225                                         | 745                                             | 6,1          | 41049          |

# RECYFIX®PLUS 150


## RECYFIX®PLUS 150 - Accessories

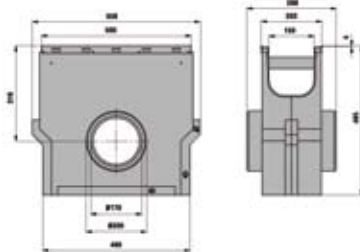

Trash box with galvanised bucket, with mesh grating MW 30/10, galvanised, class B 125, locked



Foul air trap, vertical, DN 100



End cap combined made of PE-PP with outlet DN 70/100, Type 01

|                                                                                                               | Length<br>mm | Width<br>mm | Height<br>mm | Weight<br>kg | Article<br>No. |
|---------------------------------------------------------------------------------------------------------------|--------------|-------------|--------------|--------------|----------------|
| Trash box with galvanised bucket, with mesh grating MW 30/30, galvanised, class B 125, locked                 | 500          | 202         | 496          | 18,6         | 41054          |
| Trash box with galvanised bucket, with mesh grating MW 30/10, galvanised, class B 125, locked                 | 500          | 202         | 496          | 18,6         | 41056          |
| Trash box with galvanised bucket, with GUGI-Ductile iron mesh grating MW 20/30, galvanised, class C250 locked | 500          | 202         | 496          | 20,7         | 41053          |
| Foul air trap, vertical, DN 100                                                                               | -            | -           | -            | 0,5          | 40295          |
| End cap combined made of PE-PP with outlet DN 70/100, Type 01                                                 | -            | 210         | 202          | 0,1          | 40191          |
| Drilling of connecting holes DN 150                                                                           | -            | -           | -            | -            | 973            |
| Cutting to length of NW 150                                                                                   | -            | -           | -            | -            | 991            |
| Sealing material SikaBond TS Fast, 600 ml, tubular bag, black                                                 | -            | -           | -            | 0,6          | 6890           |
| Tubular pistol for Sikaflex TS Fast                                                                           | -            | -           | -            | 1,3          | 6891           |

RECYFIX®  
PLUS

RECYFIX®  
STANDARD

SLOTTED  
CHANNELS

FASERFIX®  
STANDARD

RECYFIX®POINT  
FASERFIX®POINT

DACHFIX®

RECYFIX®  
GREEN SUPER

RECYFIX®  
GREEN STANDARD

RECYFIX®  
STREIF



LINEFIX®




# RECYFIX®PLUS 200

## RECYFIX®PLUS 200 - Combi article, class B 125

Type 010 with mesh grating  
MW 30/30, galvanised,  
locked

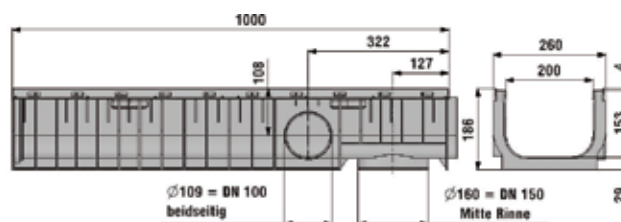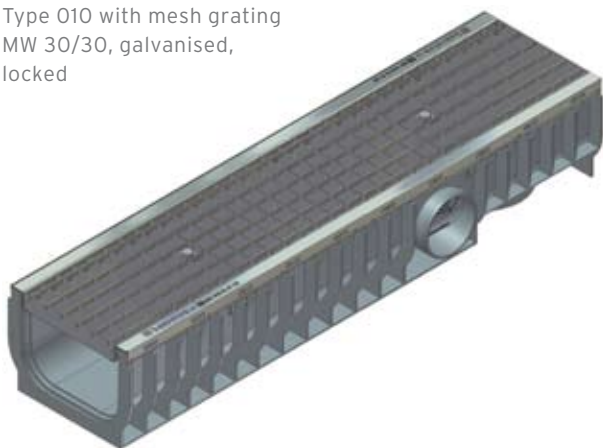

Type 020 with mesh grating  
MW 30/10, galvanised,  
locked


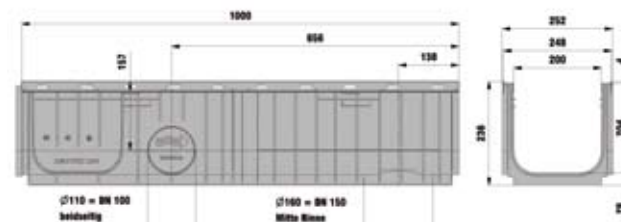


|                                                         | Length<br>mm | Width<br>mm | Height<br>mm | Drainage<br>cross-<br>sect. cm <sup>2</sup> | Intake cross-<br>sect. cm <sup>2</sup> /m | Weight<br>kg | Article<br>No. |
|---------------------------------------------------------|--------------|-------------|--------------|---------------------------------------------|-------------------------------------------|--------------|----------------|
| Type 010 with mesh grating MW 30/30, galvanised, locked | 1000         | 258         | 186          | 290                                         | 1620                                      | 10,3         | 40771          |
| Type 020 with mesh grating MW 30/30, galvanised, locked | 1000         | 252         | 236          | 366                                         | 1620                                      | 11,5         | 40773          |
| Type 010 with mesh grating MW 30/10, galvanised, locked | 1000         | 258         | 186          | 290                                         | 1442                                      | 12,2         | 40785          |
| Type 020 with mesh grating MW 30/10, galvanised, locked | 1000         | 252         | 236          | 366                                         | 1442                                      | 12,7         | 40786          |


# RECYFIX®PLUS 200

## RECYFIX®PLUS 200 - Combi article, class C 250

Type 010 with GUGI-Ductile  
iron mesh grating MW  
20/30, black, locked

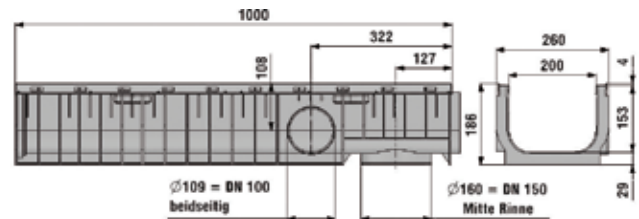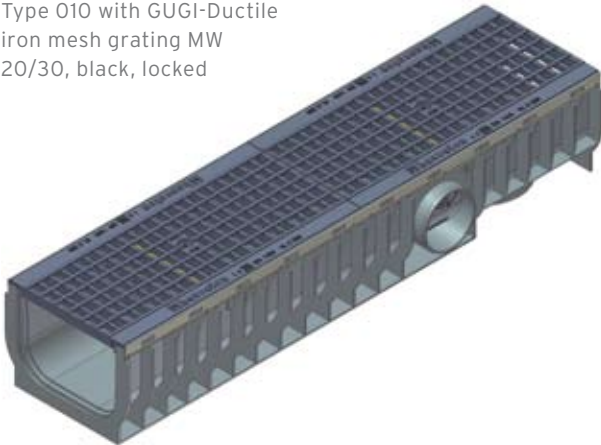

Type 020 with GUGI-Ductile  
iron mesh grating MW  
20/30, black, locked

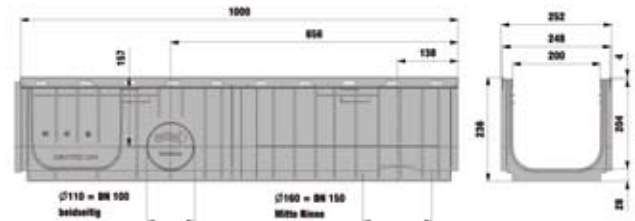

|                                                                      | Length<br>mm | Width<br>mm | Height<br>mm | Drainage<br>cross-<br>sect. cm <sup>2</sup> | Intake cross-<br>sect. cm <sup>2</sup> /m | Weight<br>kg | Article<br>No. |
|----------------------------------------------------------------------|--------------|-------------|--------------|---------------------------------------------|-------------------------------------------|--------------|----------------|
| Type 010 with GUGI-Ductile iron mesh grating MW 20/30, black, locked | 1000         | 258         | 186          | 290                                         | 825                                       | 16,6         | 40770          |
| Type 020 with GUGI-Ductile iron mesh grating MW 20/30, black, locked | 1000         | 252         | 236          | 366                                         | 825                                       | 17,2         | 40774          |
| Type 010 with Ductile iron grating 2 x 85/20, black, locked          | 1000         | 258         | 186          | 290                                         | 822                                       | 16,2         | 40760          |
| Type 020 with Ductile iron grating 2 x 85/20, black, locked          | 1000         | 252         | 236          | 366                                         | 822                                       | 16,8         | 40761          |

RECYFIX®  
PLUS

RECYFIX®  
STANDARD

SLOTTED  
CHANNELS

FASERFIX®  
STANDARD

RECYFIX®POINT  
FASERFIX®POINT

DACHFIX®

RECYFIX®  
GREEN SUPER


RECYFIX®  
GREEN STANDARD

RECYFIX®  
STREIF


LINEFIX®

# RECYFIX®PLUS 200

## RECYFIX®PLUS 200 - Accessories

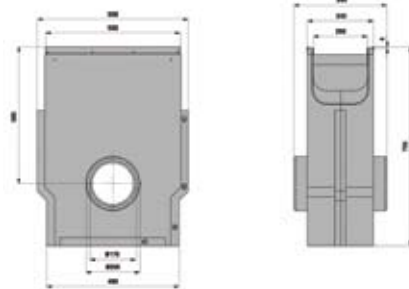

Trash box with ductile iron grating SW 2 x 85/20, black, cl. C 250, locked



End cap combined made of PE-PP with outlet DN 70, Type 010



Foul air trap, vertical, DN 100

|                                                                             | Length<br>mm | Width<br>mm | Height<br>mm | Weight<br>kg | Article<br>No. |
|-----------------------------------------------------------------------------|--------------|-------------|--------------|--------------|----------------|
| Trash box with mesh grating MW 30/30, galvanised, cl. B 125, locked         | 500          | 248         | 735          | 27,6         | 40756          |
| Trash box with mesh grating MW 30/10, galvanised, cl. B 125, locked         | 500          | 248         | 735          | 29,2         | 40757          |
| Trash box with GUGI-ductile iron grating MW 20/30, black, cl. C 250, locked | 500          | 248         | 735          | 31,4         | 40753          |
| Trash box with ductile iron grating SW 2 x 85/20, black, cl. C 250, locked  | 500          | 248         | 735          | 31,2         | 40754          |
| Foul air trap, vertical, DN 100                                             | -            | -           | -            | 0,5          | 40295          |
| End cap combined made of PE-PP with outlet DN 70, Type 010                  | -            | 258         | 185          | 0,2          | 40692          |
| End cap closed, Type 01                                                     | -            | 260         | 275          | 0,9          | 12081          |
| Drilling of connecting holes DN 200                                         | -            | -           | -            | -            | 974            |
| Cutting to length of NW 200                                                 | -            | -           | -            | -            | 992            |
| Sealing material SikaBond TS Fast, 600 ml, tubular bag, black               | -            | -           | -            | 0,6          | 6890           |
| Tubular pistol for Sikaflex TS Fast                                         | -            | -           | -            | 1,3          | 6891           |


|                 |                                             |                                |                 |                                               |                              |                                   |                             |                         |
|-----------------|---------------------------------------------|--------------------------------|-----------------|-----------------------------------------------|------------------------------|-----------------------------------|-----------------------------|-------------------------|
| <b>LINEFIX®</b> | <b>RECYFIX®</b><br>GREEN STANDARD<br>STREIF | <b>RECYFIX®</b><br>GREEN SUPER | <b>DACHFIX®</b> | <b>RECYFIX®POINT</b><br><b>FASERFIX®POINT</b> | <b>FASERFIX®</b><br>STANDARD | <b>SLOTTED</b><br><b>CAHNNELS</b> | <b>RECYFIX®</b><br>STANDARD | <b>RECYFIX®</b><br>PLUS |
|-----------------|---------------------------------------------|--------------------------------|-----------------|-----------------------------------------------|------------------------------|-----------------------------------|-----------------------------|-------------------------|



# RECYFIX®PLUS 300

## RECYFIX®PLUS 300 - Combi article, class C 250

Type 01 with GUGI-ductile iron mesh grating, locked

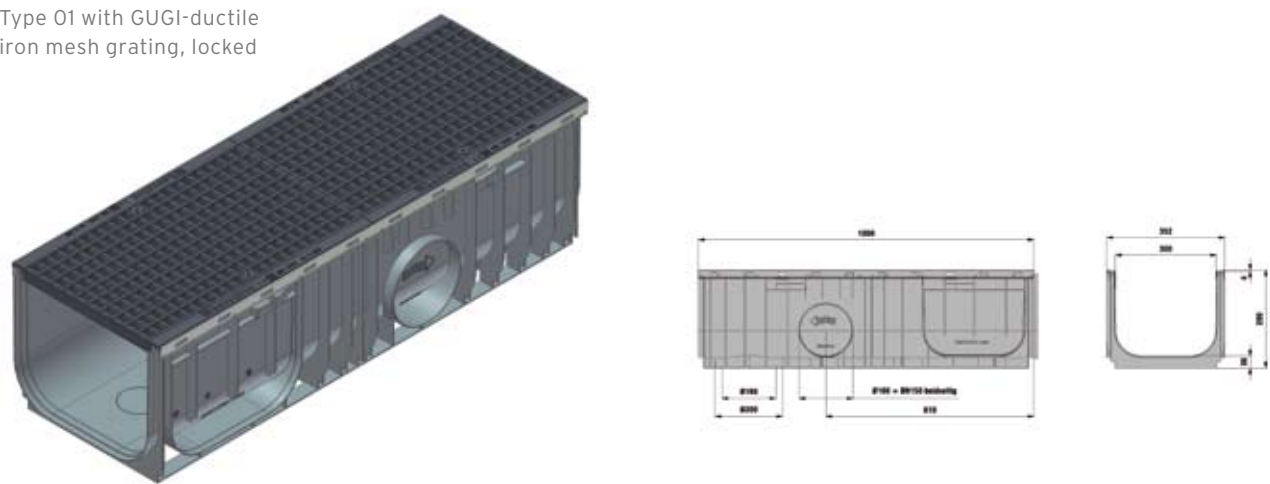

|                                                     | Length<br>mm | Width<br>mm | Height<br>mm | Drainage<br>cross-<br>sect. cm <sup>2</sup> | Intake cross-<br>sect. cm <sup>2</sup> /m | Weight<br>kg | Article<br>No. |
|-----------------------------------------------------|--------------|-------------|--------------|---------------------------------------------|-------------------------------------------|--------------|----------------|
| Type 01 with GUGI-ductile iron mesh grating, locked | 1000         | 352         | 290          | 857                                         | 1327                                      | 30,1         | 41970          |